



# FLEXFRAME® Dock Shelter

## Product Specifications



### DESIGN HIGHLIGHTS

- Side frames covered with white 18 oz. coated vinyl to transmit natural light into the loading area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Raked header permits weather drainage (flat header is used when shelter is protected by a hood or canopy)
- Roll-formed galvanized steel framing
- Fiberglass stays add stiffness to shelter face curtains

### APPLICATION DATA

Door width: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Door height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Dock height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Bumper protection\*: \_\_\_\_\_ in.

(\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Hydraulic tailgate:  Yes  No

Rear step section:  Yes  No

Tailgate/step section size: \_\_\_\_\_ in

Yard jockeys:  Yes  No

### PROJECT INFORMATION

JOB NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

GENERAL CONTRACTOR \_\_\_\_\_

DISTRIBUTOR \_\_\_\_\_

QUANTITY \_\_\_\_\_


### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

DATE \_\_\_\_\_

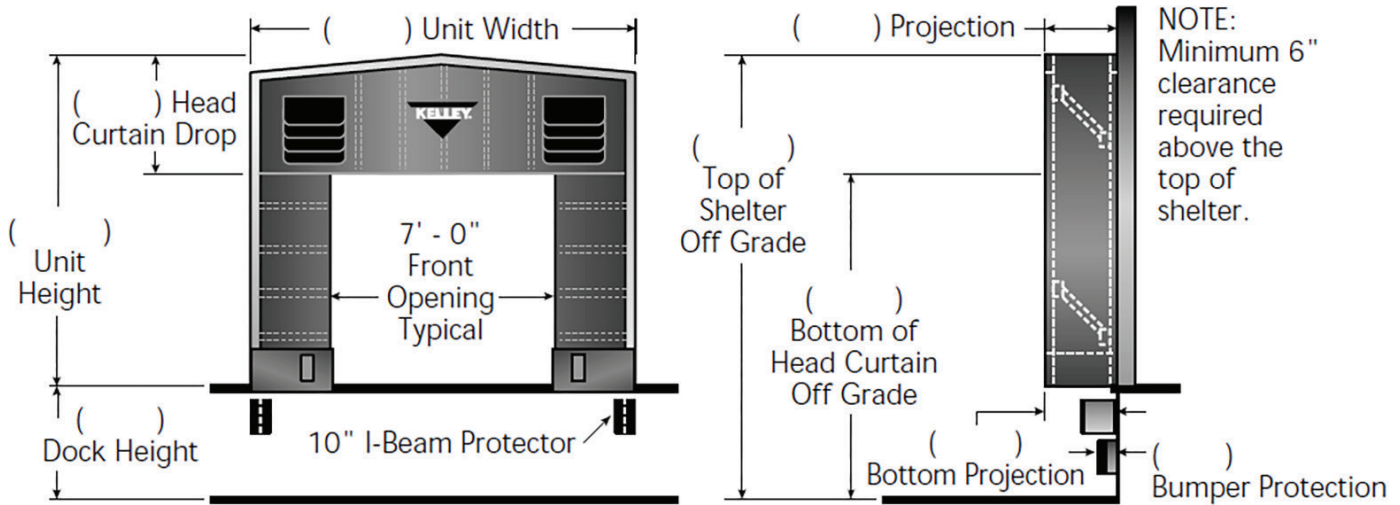

**Drive/Approach:**  Level  Incline  Decline \_\_\_\_\_ % grade

**Frame:** Standard galvanized steel

**Building Wall Construction:**  Metal  Other

**Unit Width:**  11'6"  12'0"

**Unit Height:**  11'0"  11'6"  12'0"  12'6"

**Head Member Style:**  Raked  Flat  45° Sloped

**Base Material:**  TS-55®  40 oz. CSM  40 oz. vinyl  22 oz. vinyl

**Color:**  Black  Tan  Brown  Blue  Green

**Head Curtain Drop:**  30"  36"  42"  48"  54"  \_\_\_\_\_"

**Taper:**  **Yes: Projection Options:**  18" Top/24" Bottom  24" Top/30" Bottom  24" Top/18" Bottom  30" Top/24" Bottom

**No: Projection Choice:**  18"  24"  30"  36"

**Options:**  None  Door numbers  Full length guide stripes  Pull rope assembly

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



**Kelley**  
 1612 Hutton Drive, Suite 140  
 Carrollton, TX 75006  
 800.558.6960  
 www.kelleydockssolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. KPS-SHFF-1220