


FOAMSIDE® Truck Shelter

Product Specifications

DESIGN HIGHLIGHTS


- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays is side/head curtains
- Side curtains feature removable stays
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam-filled draft pads
- Full range of fabrics and colors

APPLICATION DATA								
Door width: ftin.								
Door height:ftin.								
Dock height:ftin.								
Bumper protection*:in. (*Includes bumper projection and any building wall/foundation offset or cantilever)								
TRUCKS AND TRAILERS SERVICED								
Width: Max Min.								
Height: Max Min.								
Length: Max Min.								
Hydraulic tailgate: \square Yes \square No	Rear step section: \square Yes \square No							
Tailgate/step section size:in	Yard jockeys: ☐ Yes ☐ No							

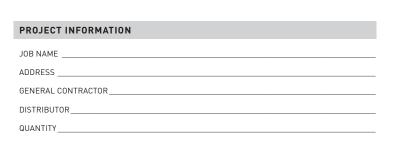



CERTIFIED FOR CONS	RUCTION
BY	
COMPANY	
ADDRESS	
DATE	

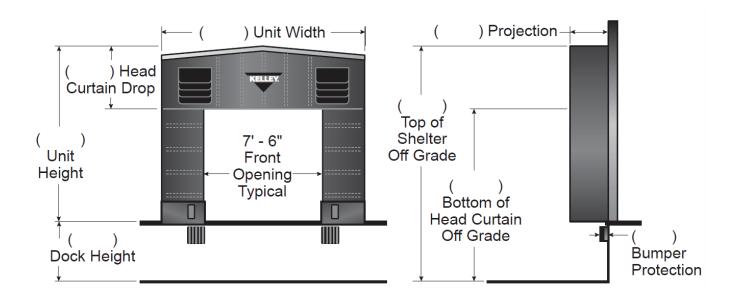

Drive/Approach:	Level	☐ Incline	☐ Decline	% grade					
Building Wall Constru	ction:	☐ Metal	☐ Other						
Unit Width:	□ 11'6"	□ 12'0"	□ 12'6"						
Unit Height:	□ 11'0"	□ 11'6"	□ 12'0" □ 1	2'6"					
Head Member Style:	☐ Raked	☐ Flat							
Curtain Material:	☐ TS-55	☐ 40 oz. CSM	☐ 40 oz. vinyl	□ 22 0	oz. vinyl				
Color:	ack 🗌 Tar	n 🗌 Brown	☐ Blue	Green					
Head Curtain Drop:	□ 30"	□ 36" □	42"	□ 54"					
Taper:	□No								
Top Projection:	□ 18"	□ 20" □ 22	2" 🗌 24"	□ 26"	□ 28"	□ 30"	□ 36"	☐ 42"	□"
Bottom Projection:	□ 18"	□ 20" □ 22	2" 🗌 24"	□ 26"	□ 28"	□ 30"	□ 36"	☐ 42"	
Options: None	□ Door	numbers [☐ Full length guide	stripes	☐ Pull rop	e assembly			

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Kelley

1612 Hutton Drive, Suite 140 Carrollton, TX 75006 800.558.6960 www.kelleydocksolutions.com