

S2000 Ultra Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays in side/head curtains
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam filled draft pads
- Full range of colors and fabrics

APPLICATION DATA

Door width:	ft	in.
Door height:	ft	in.
Dock height:	ft	in.

Bumper protection*:____ ___in. (*Includes bumper projection and any building wall/foundation offset or cantilever)


TRUCKS AND TRAILERS SERVICED					
Width:	Max	Min.			
Height:	Max	Min.			
Length:	Max	Min.			
Hydraulic tailg	ate: 🗌 Yes 🔲 I	No	Rear step section: 🗌 Yes 📋 No		
Tailgate/step s	ection size:	in	Yard jockeys: 🗌 Yes 🔲 No		

PROJECT INFORMATION

JOB NAME	
ADDRESS	
GENERAL CONTRACTOR	
DISTRIBUTOR	
MODEL	_QUANTITY

CERTIFIED FOR CONSTRUCTION

BY	 	 	
COMPANY	 	 	
ADDRESS	 	 	
DATE			

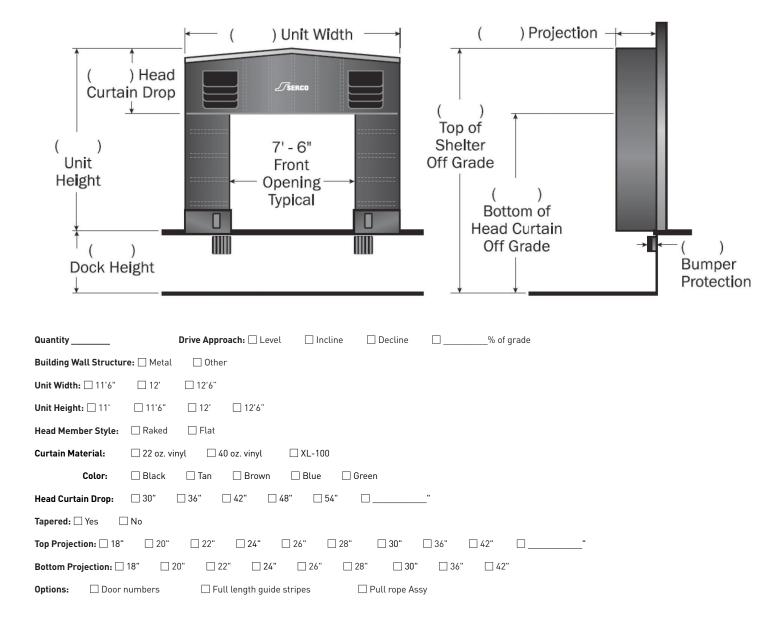

*Note: Consult factory for blockout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco 1612 Hutton Drive, Suite 140 Carrollton, TX 75006 800.933.4834 www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. AFront Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Servo as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.