

# S420 Rigid Frame Dock Shelter

## Product Specifications



### DESIGN HIGHLIGHTS

- Raked translucent head frame protects dock from elements while allowing natural light to enter dock area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Flexible fiberglass stays ensure that head and side curtain pressure is maintained on the truck body while compressible neoprene cords conform to the vehicle's irregular perimeter
- High visibility guide stripes assist drivers with proper positioning of trailer
- Frame covered with translucent fiberglass allowing natural light to enter the dock area
- Steel supports protect frame from off-center trailers
- Roll-formed galvanized steel framing (5-year warranty)
- Choice of fabric and colors

### APPLICATION DATA

Door width: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Door height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Bumper protection\*: \_\_\_\_\_ in.  
 (\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED


Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Hydraulic tailgate:  Yes  No      Rear step section:  Yes  No  
 Tailgate/step section size: \_\_\_\_\_ in      Yard jockeys:  Yes  No

### PROJECT INFORMATION

JOB NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 GENERAL CONTRACTOR \_\_\_\_\_  
 DISTRIBUTOR \_\_\_\_\_  
 MODEL \_\_\_\_\_ QUANTITY \_\_\_\_\_

### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_  
 COMPANY \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 DATE \_\_\_\_\_

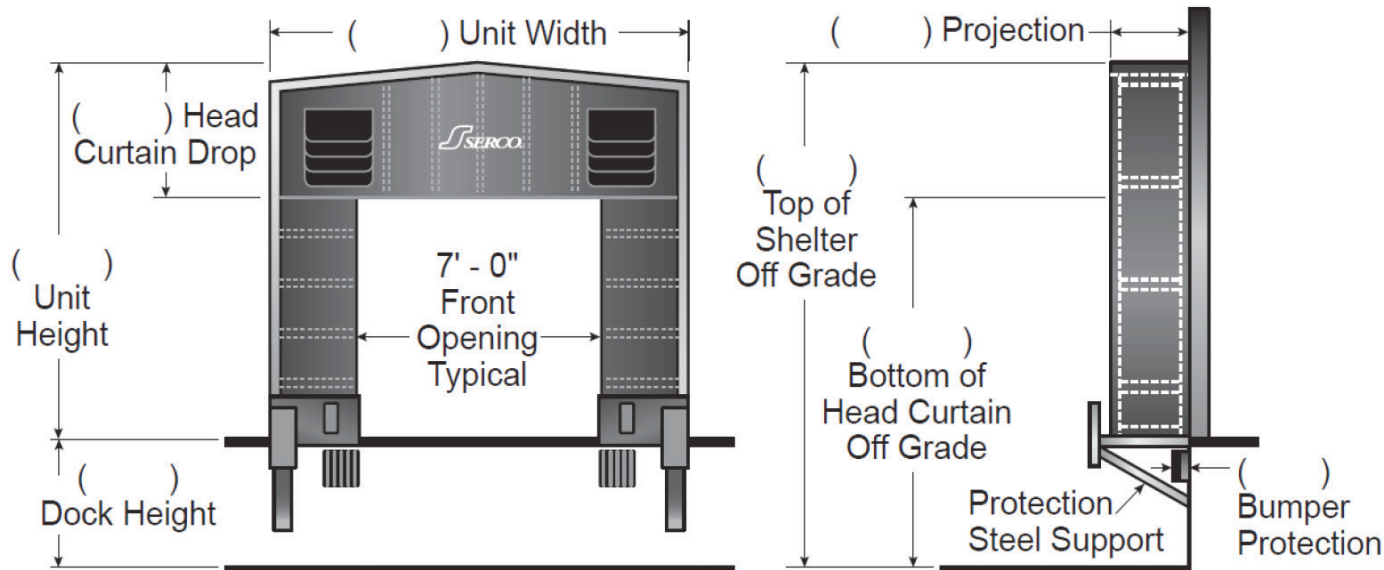

Quantity \_\_\_\_\_  Complete unit  Common member

Drive Approach:  Level  Incline  Decline  \_\_\_\_\_ % of grade

Framing:  Standard galvanized steel  Steel tube

Building Wall Structure:  Metal  Other

Unit Width:  11'6"  12'  12'6"  13'  \_\_\_\_\_"

Unit Height:  11'  11'6"  12'6"  13'6"  14'6"  15'6"

Head Member Style:  Raked  Flat  Single steel tube

Base Material:  22 oz. vinyl  40 oz. vinyl  XL-100

Color:  Black  Tan  Brown  Blue  Green

Head Curtain Drop:  30"  36"  42"  48"  54"  60"  66"  72"

Tapered:  Yes  No

Top Projection:  24"  30"  36"  42"  48"  \_\_\_\_\_"

Bottom Projection:  24"  30"  36"  42"  48"  \_\_\_\_\_"

Draft Pad:  24"  30"  36"  42"  48"

Steel Supports:  None  24"  30"  36"  42"  48"  54"

Steel Support Extensions:  None  6"  12" (Specify front channel or back extensions)

Options:  Door numbers  Full length guide stripes  Pull rope Assy

\*Note: Consult factory for blackout application assistance.

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



**Serco**  
 1612 Hutton Drive, Suite 140  
 Carrollton, TX 75006  
 800.933.4834  
 www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.